


VELOZ 12" Gas Pizza Oven

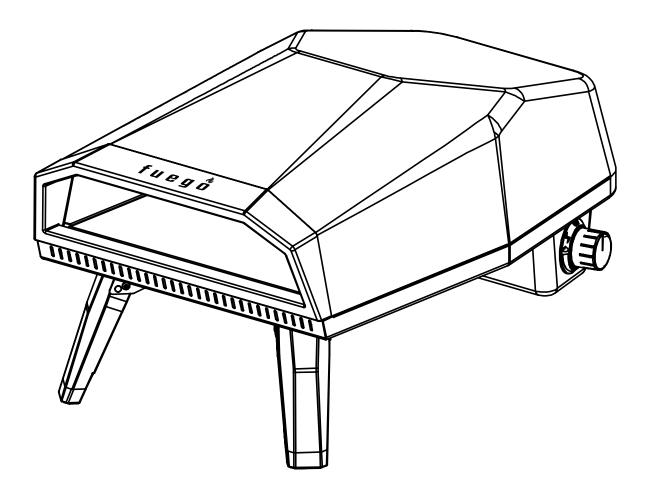

Operating Manual Instructions

TABLE OF CONTENTS

1. SAFETY PRECAUTIONS FOR GAS REGULATOR AND HOSE	02.
2. SAFETY PRACTICES TO AVOID INJURY	03.
3. DEVICE OVERVIEW AND INDIVIDUAL PARTS	04.
4. ASSEMBLEY	05.
5. CONNECTING THE LIQUID PROPANE GAS CYLINDER	07.
6. DISCONNECTING THE LIQUID PROPANE GAS CYLINDER	08.
7. LEAK TESTING	09.
7. LEAK TESTING 8. OPERATING INSTRUCTIONS	09. 10.
8. OPERATING INSTRUCTIONS	10.
8. OPERATING INSTRUCTIONS 9. CARE AND MAINTENANCE	10. 11.

IMPORTANT - WARNING 🖄

READ ALL INSTRUCTIONS BEFORE INSTALLING AND USING THE APPLIANCE. FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT IN PROPERTY DAMAGE, PERSONAL INJURY OR EVEN DEATH.

Æ WARNING

Spiders and insects can nest inside the burner of the appliance and disrupt gas flow. Inspect the burner at least once a year.

MARNING

Do not store this appliance indoors unless the gas cylinder is disconnected.

\wedge WARNING

Do not store the gas cylinder in a building, garage or any other enclosed area and keep out of reach of children at all times.

WARNING

This appliance is not intended to be installed in or on recreational vehicles and/or boats.

∕!∖ WARNING

Check all gas supply fittings for leaks before each use. Do not use the appliance until all connections have been checked and do not leak.

WARNING

Do not smoke while leak testing. Never leak test with an open flame.

WARNING Æ

When lighting, keep your face and hands as far away from the appliance as possible.

A WARNING

Minimum clearance from sides of unit to combustible construction is 500mm.

Minimum clearance from back of unit to combustible construction is 500mm.



Do not modify the appliance.

SAVE AND KEEP THESE INSTRUCTIONS TO HAND SO YOU CAN REFER TO THEM





WARNING WARNING

To reduce the risk of fire, burn hazard or other injury, read this safety manual carefully and completely before using this appliance.



\land WARNING

Before cleaning, make sure the gas supply and control knob is in the OFF position and that the burner and oven has cooled.

Failure to follow these instructions could result in fire, explosion or burn hazard which could cause property damage, personal injury or death.



WARNING

For outdoor use only.



DANGER

If you smell gas:

- Shut off gas to the appliance.
- Extinguish any open flame.
- If the smell persists, keep away from the appliance and immediately call your gas supplier or your fire department.



🔨 WARNING

- 1. Keep the fuel supply hose away from any heated surface(s).
- 2. The use of alcohol, prescription or non-prescription drugs may impair the consumer's ability to properly assemble or safely operate the appliance.
- 3. Keep children and pets away from the appliance at all times.
- 4. Do not move the appliance when in use.
- 5. This appliance is not intended for and should never be used as a heater.

FUEGOVELOZVI 01/05/23

1. Safety precautions for gas regulator and hose


- The parts which have been sealed by the manufacturer should not be adjusted by the user.
- When the appliance is using LPG, a LPG cylinder should be used.
- The LPG cylinder size: max diameter-390mm, max height-455mm.
- The minimum distances between the appliance and adjacent walls is 0.5m.
- The hose for the appliance should not exceed 1.5m.
- The gas supply tubing or hose shall comply with the national requirements in force and shall be periodically examined and replaced as necessary.
- The hose should comply with the standard EN16436. The regulator should comply with the standard EN16129.
- The necessity of changing the flexible tube when the national conditions require it, and depending on its validity.
- Check and suitably clean the inside of the oven before it is lit in order to avoid the emission of fire from the oils that have accumulated during previous cooking.
- The burner outlets should be checked for obstruction during previous cooking.
- The burner outlets should be checked for obstruction and cleaned regularly with a soft wire brush.
- It is necessary to avoid obstruction and to allow for a good combustion.
- The position of the connection flexible tube so as to ensure that it is not subjected to twisting.

2. Safety practices to avoid injury


When properly cared for, your oven will provide safe, reliable service for many years. However, extreme care must be used as the oven produces intense heat that can increase the risk of accidents. When using this oven basic practices must be followed, including but not limited to following:

- Do not repair or replace any part of the oven unless specifically recommended in this manual. All other • service should be referred to a qualified technician.
- Children should not be left alone or unattended in an area where the oven is being used. Do not allow • children to sit, stand or play around the oven at any time.
- Never let clothing or other flammables come in contact with or too close to any burner or hot surface until it has cooled. The fabric could ignite, causing serious personal injury.
- For personal safety, wear proper apparel. Loose fittings garments or sleeves should never be worn while using the oven. Some synthetic fabrics are highly flammable and should not be worn while cooking.
- Do not heat unopened food containers as a buildup of pressure may cause the containers to burst. When lighting the burner, always pay close attention to what you are doing.
- When using the oven, do not touch the outer shell, stone baking board or immediate surroundings as these areas become extremely hot and could cause burns.
- Do not use the oven to cook extremely fatty meats or other products which increase flare-up.
- Keep the area around the oven free of combustibles, including liquids, garbage, and steam, such as gasoline ٠ or charcoal lighter fluid. Do not obstruct the flow of combustion and ventilation air.
- Never use the oven in extremely windy conditions.
- The temperature under the oven is high. Do not place the oven on a table with flammable table cloths, plastic or any other inflammable materials.
- We recommend using protective gloves when handling particularly hot components.

3. Device overview and individual parts

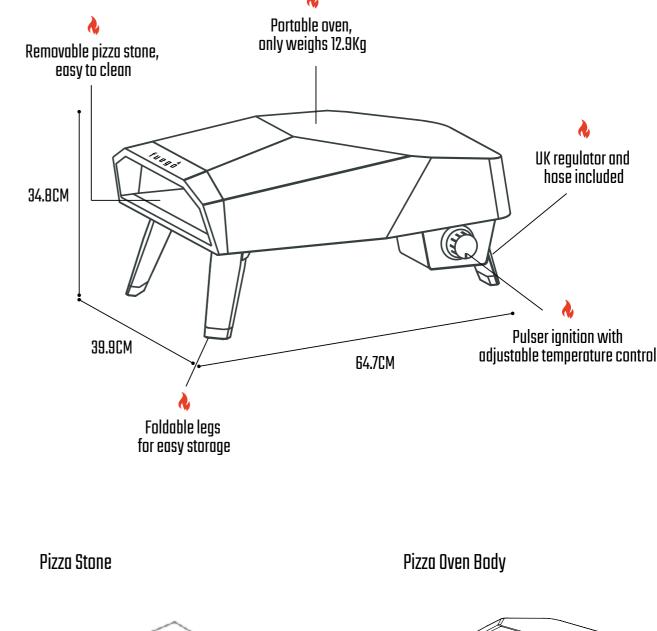









4. Assembly

Before assembly, make sure all parts are present. If any part is missing or damaged, do not attempt to assemble the appliance. Contact customer service for replacement parts.


1. Unfold Legs







3. Connect the gas hose to the pizza oven.






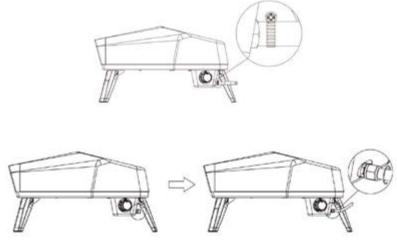


4. The minimum distance between the equipment and the cylinder is 0.5 m

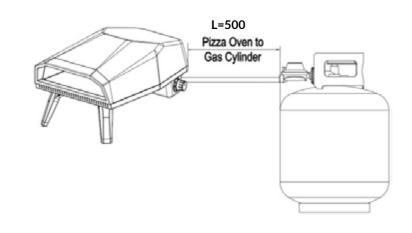


2. Insert the pizza stone in the oven.

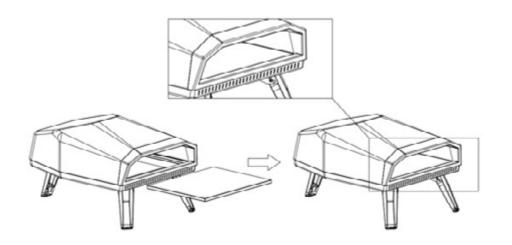

5. Unscrew the lid of pulser ignition counterclockwise





Insert the AAA battery and tighten the lid of pulser ignition clockwise

> 06. FUEGOVELOZV1_01/05/23


WARNING \land

- Please always keep the gas bottle in upright position.
- The size for 20 lbs LP gas cylinder is 390mm in diameter and 455mm tall. .
- If the appliance is not in use, the gas must be turned off at the supply cylinder.
- The cylinder used must include a collar to protect the cylinder valve. •
- The minimum distance for the appliance and the LP gas cylinder is 500mm apart.
- Keep all gas cylinders away from any source of ignition. •
- Do not obstruct the ventilation openings of the cylinder compartment.

5. Connecting the Liquid Propane Gas Cylinder


To connect the liquid propane gas cylinder:

- 1. The cylinder valve should be in the OFF position.
- 2. Make sure the burner valve is in the OFF position.
- 3. Inspect the valve connections, port and regulator assembly. Remove debris and inspect the hose for damage.
- When connecting the regulator assembly to the valve, use your hand to tighten the nut clockwise until it 4. stops. Using a wrench could damage the quick coupling nut and result in a hazardous situation.
- 5. Open the cylinder valve fully by turning the valve counterclockwise.
- 6. Before lighting the oven, use a soap and water solution to check all connections for leaks.
- 7. If a leak is found, turn the cylinder valve OFF, and do not use the oven until a local competent registered gas servicing company can make repairs.



Patio Gas Regulator

This is a push-on gas fitting. Ensure that the black switch is in the horizontal position. Depress the button located below the black switch and press the regulator on to the tank valve until it locks into place.



Gas Regulator

This gas fitting is counterclockwise. Make sure that the tank is completely switched off and screw the regulator as far as possible into the gas tank valve.

6. Disconnecting the liquid propane gas cylinder

- 1. Turn the oven burner valve OFF and make sure the oven is cool.
- 2. Turn the liquid propane cylinder valve OFF by turning clockwise until it stops.
- 3. counterclockwise.
- 4. Place dust cap on the cylinder valve outlet whenever the cylinder is not in use.



PORTABLE take it everywhere you go







Detach the regulator assembly from the cylinder valve by turning the quick coupling nut



60 SECONDS to cook pizza



LOW MAINTENANCE

and easy to clean



ADJUSTABLE temperature control

7. Leak testing

General

Although the gas connections of the appliance are leak tested prior packing and shipment, a complete test must be performed on the installation site.

Before each use, check all the gas connections for leak testing using the procedure listed below. If the smell of gas is detected at any time, you should immediately stop using and check the entire system for leaks.


Before testing

Make sure all packing material has been removed from the appliance.

Make a solution of one part liquid detergent and one part water. You will need a spray bottle, brush or rag to apply the solution to the fittings.

To test

- 1. Turn the burner valve OFF
- 2. Turn the liquid propane cylinder valve on counterclockwise to open the valve.
- Apply the soap solution to all gas fittings. Soap bubbles would appear where a leak is present. 3.
- If a leak is present, immediately turn the gas supply OFF and tighten leaky fittings. 4.
- Turn the gas back ON and recheck. 5.
- Should the gas continue to leak from any of the fittings, turn the gas supply OFF and contact our customer 6. services.

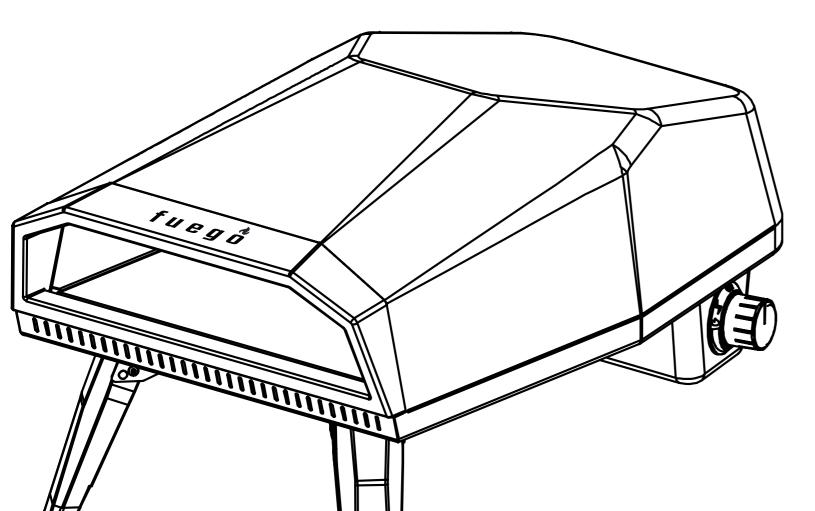

8. Operating Instructions

Using the Oven

Each burner is rated at 4.65KW. To begin:


- Make sure the oven has been leak tested and properly placed. 1.
- 2. Remove any remaining packing material.
- 3. Light the burner using the LIGHTING INSTRUCTIONS below.

Lighting Instruction To Light The Burner

- 1. Make sure the control knob is in OFF position, and then turn the liquid propane cylinder valve ON by slowly turning counterclockwise.
- Push in and slowly turn the control knob anticlockwise until you hear a click and the burner ignites. 2.
- 3. If burner doesn't light, turn the knob OFF, wait 5 minutes and repeat the lighting.

To Light with a match

- 1. If burner will not light after several attempts using the control knob, the burner may be lit with a match.
- 2. dissipate.
- 3. burner.
- Push and turn the control knob to HI slowly, the burner should ignite immediately. 4.
- 5. If the burner does not light within seconds, turn the control knob OFF and wait 5 minutes and try again.

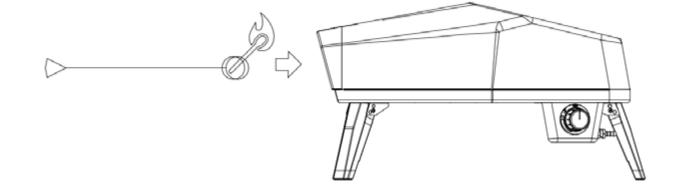



If you have already attempted to light the burner using the control knob, wait 5 minutes for any gas to

Insert a match into the matchstick holder, ignite the match and insert through the oven opening to the

9. Care and Maintenance

Store VELOZ out of direct sunlight and indoors where possible and when storing for extended periods of time. VELOZ should not be exposed to harsh weather conditions such as snow, heavy rain and strong winds.

Wait for VELOZ to cool completely before moving.

The outer shell of VELOZ may fade over time and through use. This will not affect performance.

STONE BAKING BOARD

- 1. DO NOT use the stone over an open flame.
- 2. Avoid extreme temperature change to the stone. DO NOT place frozen foods on a hot stone.
- 3. The stone is fragile and can break if bumped or dropped.
- 4. The stone is very hot during use and stays hot for a long time after use.
- 5. DO NOT cool the stone with water when the stone is hot.
- 6. After cleaning the stone with water, please dry the stone before use. This can be done in a conventional oven at 60°C (140°F) for 2 hours.

10. Troubleshooting

Problem	Possible Cause	Prevention/Solution		
Burner will not light	 No gas flow Coupling nut and regulator not fully connected Obstruction of gas flow Disengagement of burner to valve Incorrect assembly 	 Check to see if propane tank is empty Turn the coupling nut about one- half to three quarters additional turn until solid stop. Tighten by hand only do not use tools Clear burner tube Reengage burner and valve Check steps in assembly instructions 		
Sudden drop in gas flow or low flame	1. Out of gas	1. Check for gas in propane tank 2. Turn off gas control knob, wait 30 seconds and light oven. If flames are still low, turn off gas control knob and propane tank valve. Disconnect regulator. Reconnect regulator and leak test. Turn on propane tank valve, wait 30 seconds and then light oven.		
Flames blow out	1. High or gusting winds 2. Low on propane gas	 Turn front of oven away from wind Refill propane tank Refer to Sudden drop in gas flow above 		
Flare-up	 Grease buildup Excessive fat in meat Excessive cooking temperature Excess flour on the cooking surface 	 Clean oven Trim fats from meat before cooking Adjust (lower) temperature accordingly Brush remnant flour from cooking surface Flip stone 		
Flashback (fire in burner tube, roaring sound from burner)	 Burner and/or burner tubes are blocked Pressure drops during ignition 	 Turn gas control knob off. Clean burner and/or burner tubes. Turn off oven, ensure the tank valve is fully open (if applicable) and relight. 		

11. Ratings Card

Appliance I	Name	Veloz 12" Gas Pizza Ov		en	1		1336
Model No.		P200A		PIN: 51DN5100			
Appliance Category 13+(28-30/37)		I3B/P(30) 🗆		13B/P(37) 🗖	13B/P(50) 🗖		
Type of gas	5	Butane Propane		Butane,Propane or their mixture		Butane,Propane or their mixture	Butane,Propane or their mixture
Gas Pressu	re	28-30mbar 37mbar		30mbar		37mbar	50mbar
Country of Destination		GR, IE, IT, L	E, IT, LT, LU, PT, HU, IT, IS,L		DK, EE, FI, HR, IS,LT, LU, MT, , RO, SE, SI, TR	PL	AT, DE, CH
Total Heat Input (kW)			4.65				
Gas consumption(g/h)		G30:338; G31:332					
Injector	Main grill	1.08	mm	1.08 mm		1.01 mm	0.94 mm
Serial No.		2	30600001	01		Made in China	
A WAR	NING						
*Warning: *This appli	instructions b Accessible pa	rts may be ve kept away fr	ery hot. Kee om flamma	ep away f	rom young chile rials during use		
	Unit 42		k, Thorp Ar	ch Estate	ego Wood-Fire , Wetherby, Wo odfiredovens.co	est Yorkshire, LS23 7F	G, UK

12. Servicing & spare parts

Your gas barbecue should be serviced annualy by a competent registered gas servicing company. For spare parts please contact:


Fuego Wood-Fired Ovens

Unit 427B, Birch Park, Thorp Arch Estate, Wetherby, West Yorkshire, LS23 7FG, UK

Tel: 01937 290 080

Email: info@fuegowoodfiredovens.com

www.fuegowoodfiredovens.com

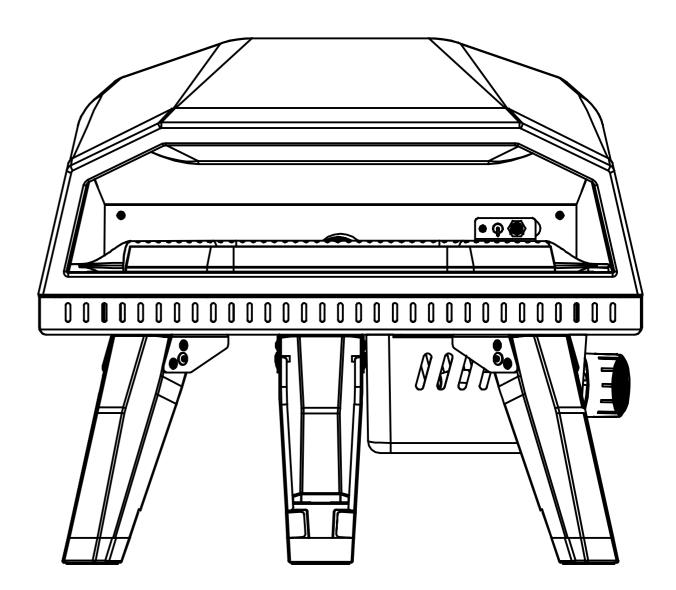





Unit 427A Birch Park Thorp Arch Estate Wetherby, West Yorkshire LS23 7FG

Tel: 01937 290 080 Email: info@fuegowoodfiredovens.com www.fuegowoodfiredovens.com

